



ELECTRICALLY OPERATED POWER PACK HORIZONTAL WITH MANUAL CYCLE

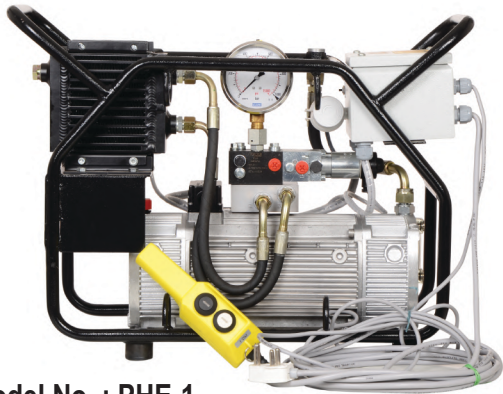

Model No. : PHE-1

- Heavy duty steel frame for handling, usage and transportation.

ELECTRICALLY OPERATED POWER PACK HORIZONTAL WITH AUTO CYCLE

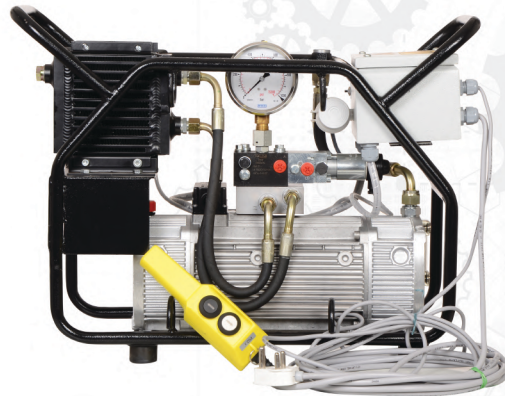

Model No. : PHE-2

- In built heat exchanger to cool the system
- Reduces & Dissipates the heat in the oil to decrease operating temperature for extended work cycles
- Best suitable for shut down and long hours operation

PHE & PHP SERIES


ELECTRICALLY OPERATED POWER PACK FOR MULTIPLE TORQUE WRENCHES – 3 STAGE



Model No. : PHE-3

- In built heat exchanger to cool the system

AIR OPERATED POWER PACK – MANUAL CYCLE

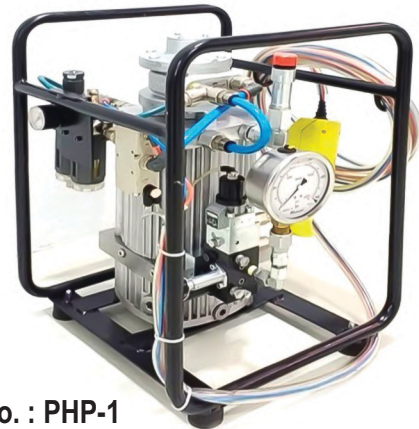

Model No. : PHP-1

- Logical layout engraved for easy operation.
- NOTE:- RECOMMENDED HYDRAULIC OIL : ISO VG 68

TECHNICAL SPECIFICATION

Model No.	PHE-1	PHE-2	PHE-3	PHP-1
Voltage	1~ 230V 50Hz	1~ 230V 50Hz	1~ 230V 50Hz	
Power Rating	1.5HP / 1.1Kw	1.5HP / 1.1Kw	1.5HP / 1.1Kw	1.7 HP
Maximum Pressure	700 Bar	700 Bar	700 Bar	700 Bar
Flow Rate	9.8LPM @ 70 Bar / 0.98 LPM @ 700 Bar	9.8 LPM @ 70 Bar / 0.98 LPM @ 700 Bar	1.6 LPM @ 70 Bar/ 0.98 LPM @ 700 Bar	8.0 LPM @ 70 Bar / 0.98 LPM @ 700 Bar
Oil Tank Capacity	6 Liters	6 Liters	7 Liters	5 Liters / 10Liters
Port Size	A & B : 1/4" BSP	A & B : 1/4" BSP	A & B : 1/4" BSP	A & B : 1/4" BSP
Weight	35 kg	35 kg	26 kg	25 kg

Hydraulic Twin Hose
having length 5, 6 and 12 Mtrs Long

